

Lithium Battery

UNIV7200W

Basic Specification

Nominal Energy: **7.17kWh(25.6V, 280Ah)**

Max. Discharge Current: **200A**

Operating Temperature: **Charge: 0~55°C**

Discharge: -20~60°C

Expandability: **Up to 16 parallels , 114.72kWh**

Depth of Discharge(DOD): **90%**

Communication: **CAN/RS485**



New cell

Brand new Grade-A cells



Large Scalability

Flexible for expansion and installation



10 Years Warranty

5+5 years warranty for our devices



LCD Display

With LCD display



Wide Compatibility

Matching with multiple inverters, used in different scenarios(On-grid/Off-grid)

Lithium Battery

UNIV7200W

Installation Method





Wall-mounted

Lithium Battery


UNIV7200W

Appearances

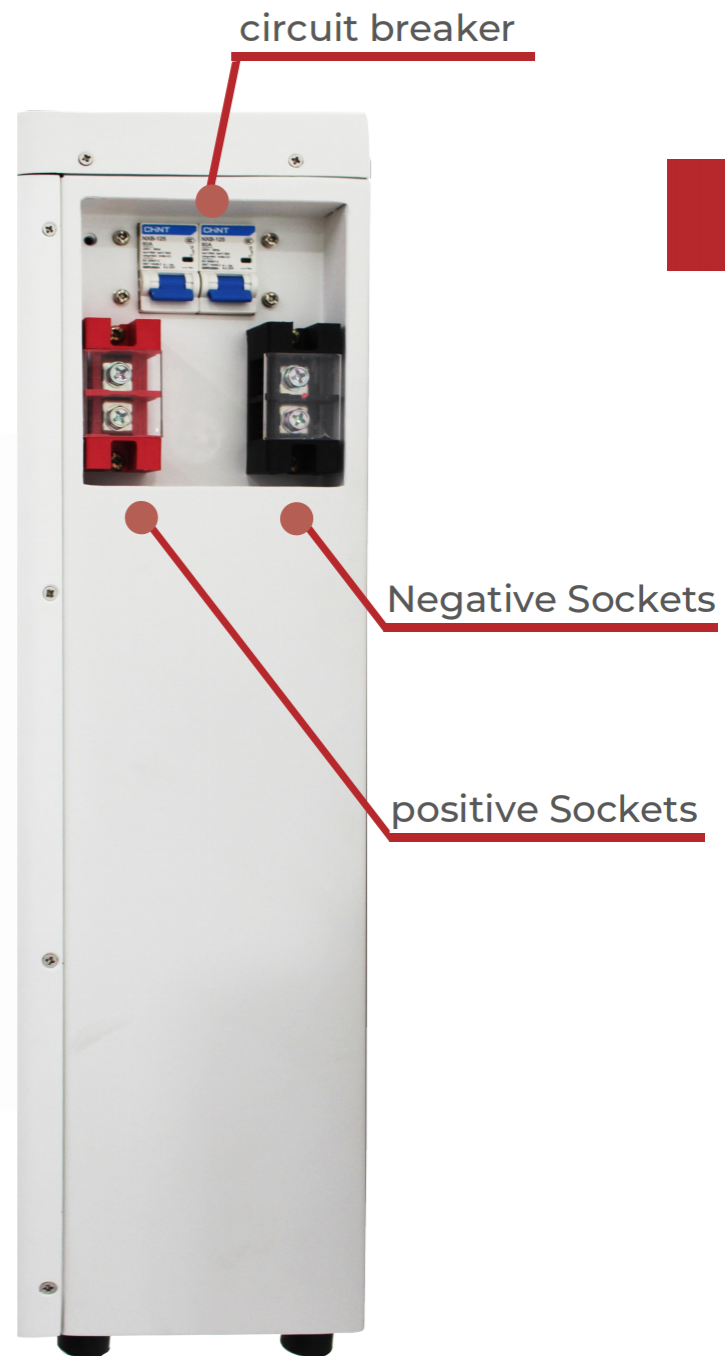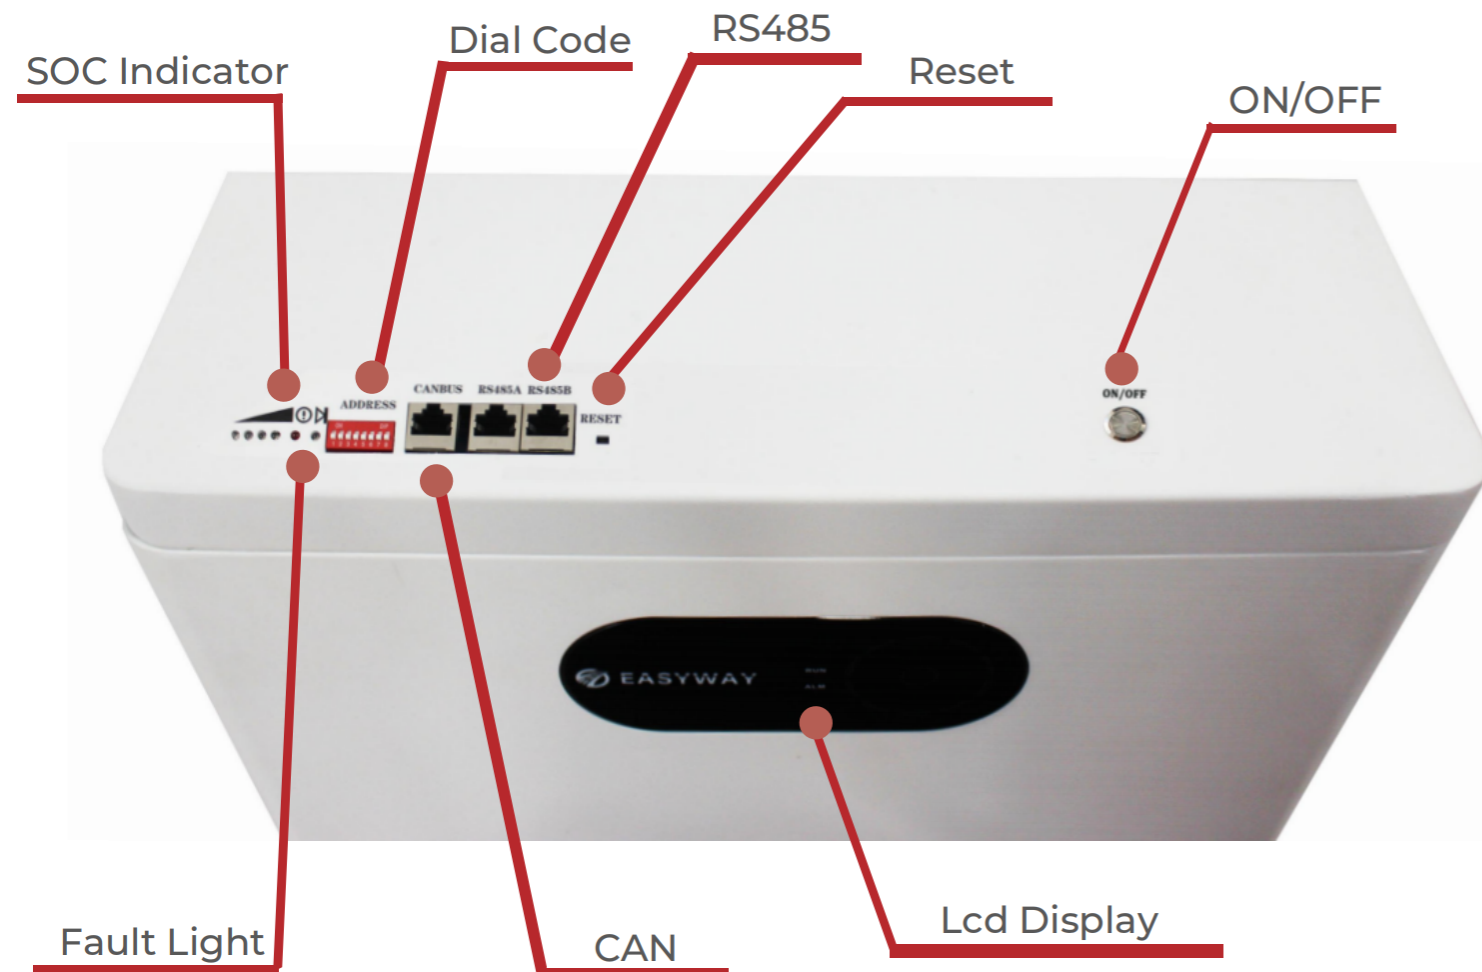


Structural Analysis

Using a circular hole design for openings enhances heat dissipation efficiency.

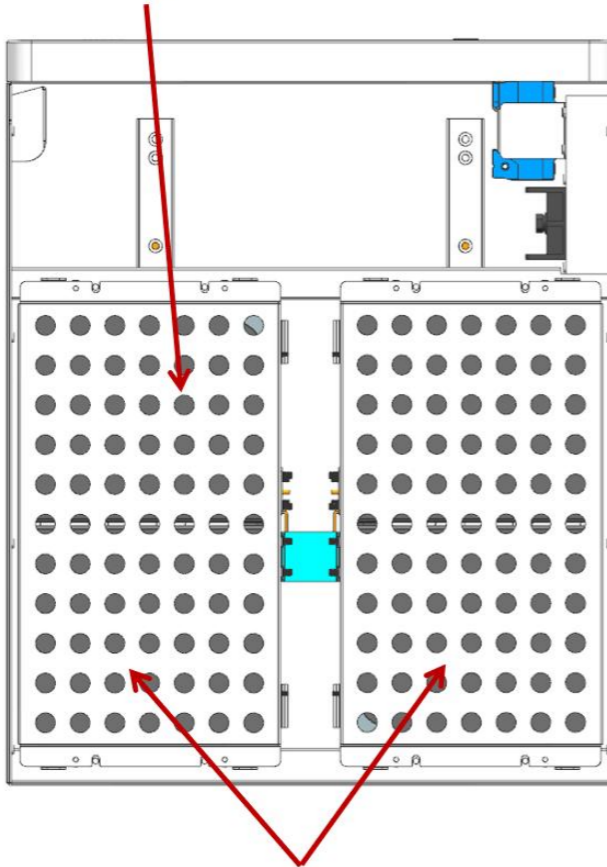


Designed with a dual-module structure divided into left and right sections, the construction is robust, enhancing safety.

Light panel : change lighting according to SOC variations.

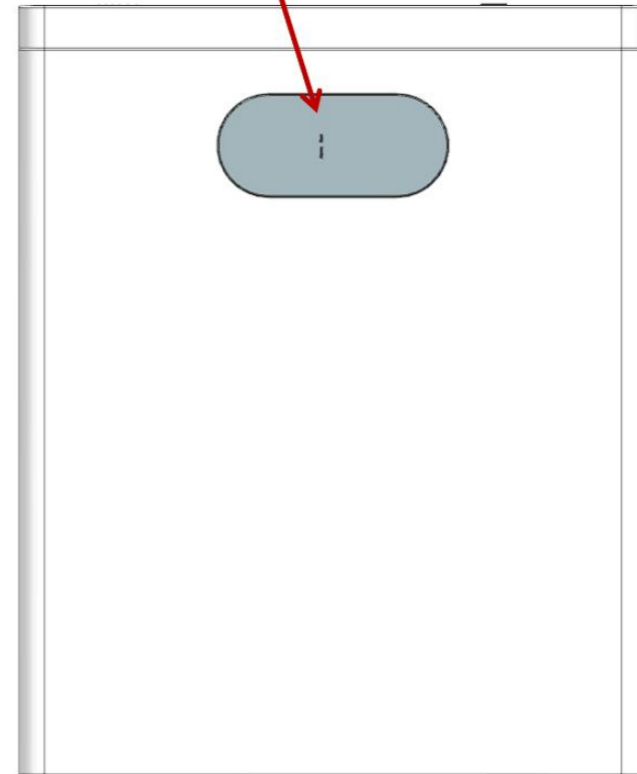

Exploded Diagram

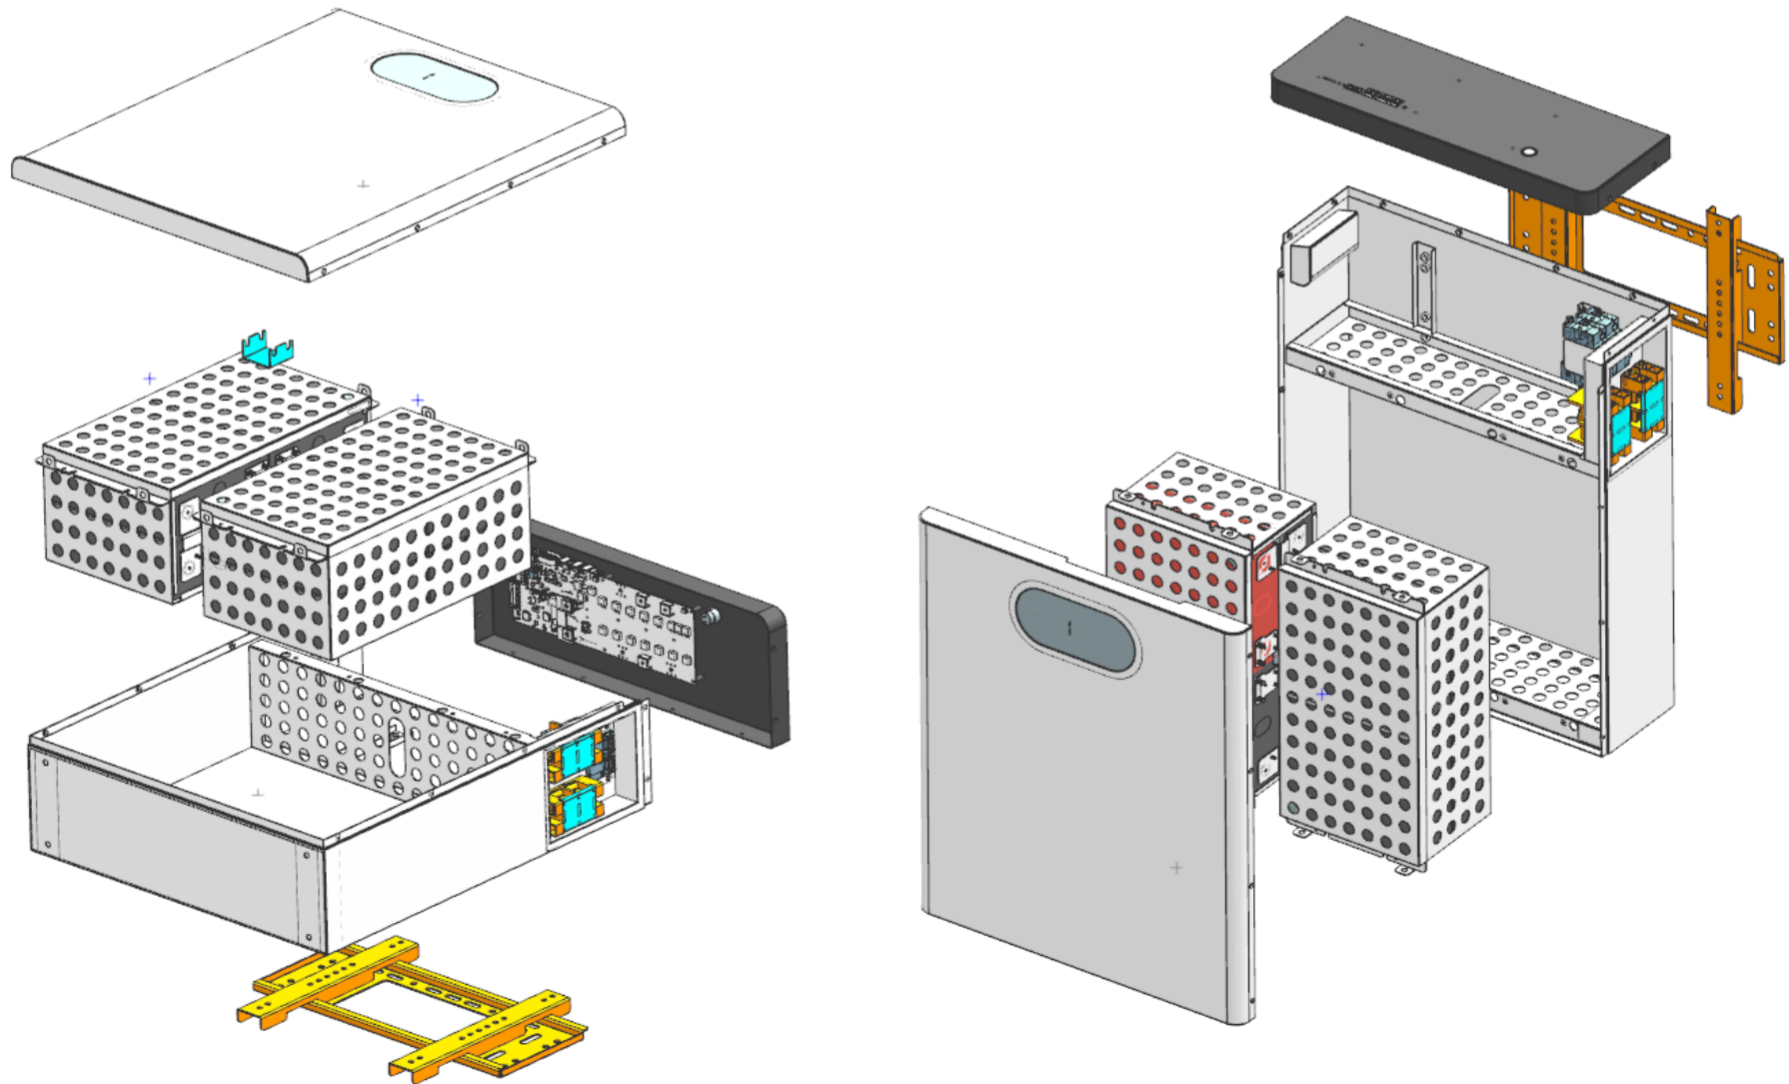

Lithium Battery

UNIV7200W

Connection Diagram

